

# WORLD CLASS WINCHES

RELIABLE – DEPENDABLE – UNCOMPLICATED



## SEPDURANCE H240

Rope "under wound"

### Technical Data

**Freespool clutch**

**Max. pulling force in low speed mode\***

- bottom rope layer
- top rope layer

**Max. rope speed in low speed mode\***

- bottom rope layer
- top rope layer

**Maximum rope speed in high speed mode**

- bottom rope layer
- top rope layer

**Maximum oil pressure**

**Maximum oil flow**

**Rope drum diameter**

**Rope diameter**

**Rope length**

**Rope MBL (EN 14492-1)**

**Number of rope layers**

**Winch weight**

**Rope weight**

**Dimensional drawing (mm)**

**Product # 63.34-048**

Pneumatic

240 kN

162 kN

3 m/min

4,5 m/min

10 m/min

14,5 m/min

200 bar

80 l/min

280 mm

24 mm



60 m

≥ 480 kN

4

450 kg

190 kg

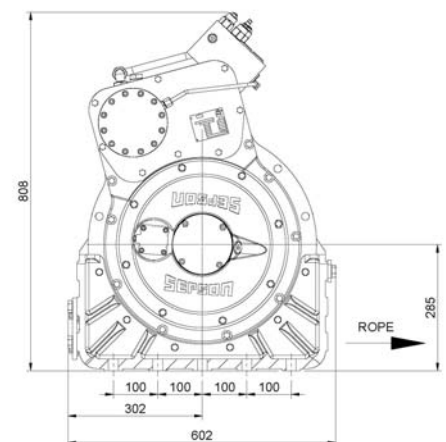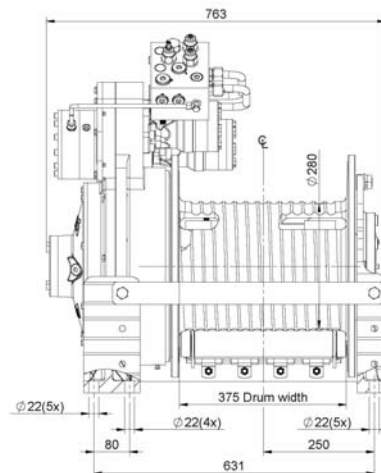

Compliant to EN 14492-1

