

# WORLD CLASS WINCHES

RELIABLE – DEPENDABLE – UNCOMPLICATED



## SEPDURANCE H300

Rope "under wound"

### Technical Data

Product # 63.34-058

**Freespool clutch**

Pneumatic

**Max. pulling force in low speed mode\***

- bottom rope layer
- top rope layer

300 kN  
190 kN

**Max. rope speed in low speed mode\***

- bottom rope layer
- top rope layer

2.5 m/min  
4 m/min

**Maximum rope speed in high speed mode**

- bottom rope layer
- top rope layer

8 m/min  
13 m/min

**Maximum oil pressure**

200 bar

**Maximum oil flow**

80 l/min

**Rope drum diameter**

234 mm

**Rope diameter**

26 mm

**Rope length**

60 m

**Rope MBL (EN 14492-1)**

≥ 600 kN

**Number of rope layers**

4



**Winch weight**

455 kg

**Rope weight**

210 kg

**Dimensional drawing (mm)**

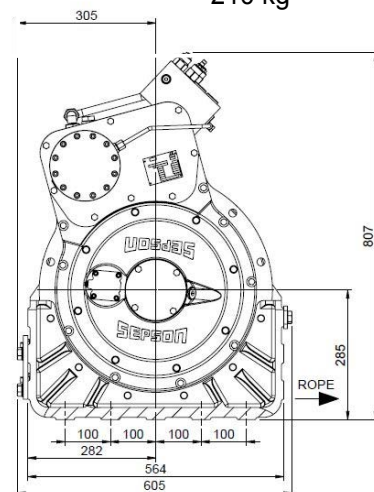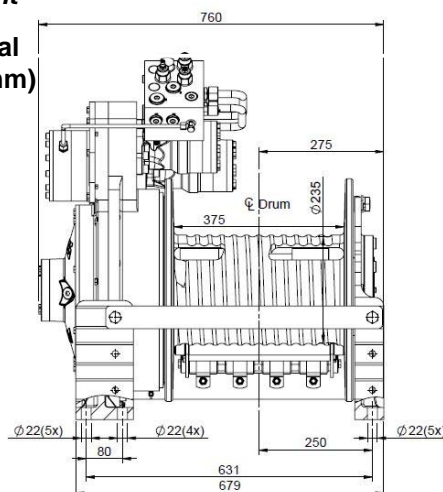

Compliant to EN 14492-1

